



On Duty 24/7

AquaGuard®

AG-9300-MIT


AG-9300-MIT FOR MITSUBISHI ELECTRIC MINI-SPLIT SYSTEMS

The AquaGuard AG-9300-MIT is the first electronic condensate drain sensor developed and engineered to work exclusively with all Mitsubishi Electric residential and commercial mini-split systems.

The AG-9300-MIT continuously monitors any condensate overflow in the primary drain pan and automatically shuts off the mini-split system and activates an alarm if any overflow is detected.


The compact control box and probe of the AG-9300-MIT fit completely inside Mitsubishi Electric's single and multi-zone system indoor units.

For quick and easy installation, the AG-9300-MIT comes complete with three exclusive wire harnesses to fit a variety of Mitsubishi Electric indoor unit models.

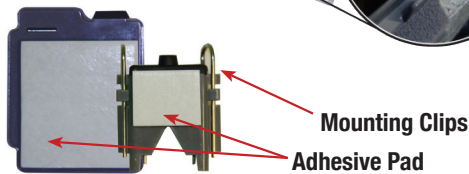


AG-9300-MIT Features:


- Meets International Building Codes and Meets or Exceeds Multiple Municipal Codes
- Three Exclusive Wire Harness Connector Plugs Designed in Close Collaboration with Mitsubishi Electric
- Long-Life Lithium Battery Included (Lasts Up to the Life of the Mitsubishi Electric Indoor Mini-Split Unit)
- Up to a 20-Second Make/Break Delay with Automatic Reset and Low Battery Audible Alert
- Quick and Easy Installation
- Patent Pending, UL 508 Approved



M1 Wire Harness



P Wire Harness



M2 Wire Harness



AG-1100E/AG-1175E



- 5 Amp-High Capacity, Solid State Sensor
- Residential and Commercial Applications
- Shut-off with as Low as 1/8" of Condensate in the Drain Pan
- Sensors are Protected from False Trigger Causing Debris
- Mounts to Drain Pan in Seconds with Just 1 Thumbscrew
- Time Delay
- Water Detection LED (AG-1175E)
- Plenum Rated (AG-1175E)

SECONDARY METAL PAN SENSOR

AG-1250E



Metal Contacts

- Normally Open 4th Wire for Optional External Alarm, Digital Controller or Energy Management Systems
- Switch can be normally open or normally closed
- Versatile mounting options allow positioning on the unit, in a secondary pan, floor or wall
- 5 Amp, 24 Volts AC solid state sensor
- Clip on mounting base for easy cleaning and drying of sensor

MULTIPURPOSE WATER SENSOR METAL/PLASTIC SECONDARY DRAIN PANS

AG-3180E



- Smart Sensor Technology(Patent Pending)
- Perfect Solution for Self-Contained Package Units
- Time Delay: Up to 60 Seconds On
- Meets Internal Primary Pan Code Requirements
- 6' of Plenum Rated Probe Wire
- 6' of Plenum Rated Control Wire
- Water Detection LED
- 5 Amp, Solid State Sensor

PLENUM RATED MICRO PAN SENSOR

IDEAL FOR COMMERCIAL PACKAGE UNITS,
METAL/PLASTIC SECONDARY PAN AND
PRIMARY PAN WITH TIME DELAY

AG-3150E/75E



- Smart Sensor Technology (Patent Pending)
- Time Delay: Up to 60 Seconds On
- Redesigned Probe Sensor for Increased Reliability
- Compact Waterproof Design
- Bonus Secondary Sensor
- Water Detection LED
- AG-3175E Is Plenum Rated
- 5 Amp, Solid State Sensor

PRIMARY PAN SENSOR WITH TIME DELAY

AG-9300U



- Meets International Building Codes
- Easy Installation
- Up to 20 Second Make/Break Delay
- Low Battery Audible Alert
- Automatic Reset
- UL 508 Approved

UNIVERSAL MINI-SPLIT DRAIN SENSOR

PRODUCT SELECTION GUIDE

	METAL SECONDARY PANS	PLASTIC SECONDARY PANS	PRIMARY PAN	MINI-SPLIT	COMMERCIAL PACKAGE UNIT	PLENUM APPROVED
AG-1100E	X					
AG-1175E	X					X
AG-1250E	X	X				
AG-3180E	X	X	X		X	X
AG-3150E	X	X	X			
AG-3175E	X	X	X			X
AG-9300U				X		